

'Partner' Large Facemask w/ Ear-loops

Non-sterile - ISO Class 5 + Cleanroom

LYNBOND



About

Three-layer (3-Ply) pleated cleanroom Facemask incorporating elasticated ear loops. Constructed using Polypropylene for the inner and outer layer with a melt blown micro-denier filter which filtrates 98% to 0.3µm. The facemask is low-linting and provides process protection from contamination with good levels of comfort, breathability and particle filtration. The facemask is sonically bonded for strength and cleanliness and the nose piece enclosed is made from a PVC coated wire which is easily adjusted for comfort.

Specification

- Compatibility: ISO Class 5 + Cleanrooms
- Length: 180 x 90mm
- Low lint Polypropylene
- Comfortable to wear from long periods
- Melt blown micro denier filter
- Polypropylene ear loops
- Ultra Sonic bonding
- White
- Economically bulk packed

Features

- Filtrates 98% to 0.3µm
- Light weight and cost effective
- Low linting

Application

- ISO Class 5 + Clean rooms
- Semiconductor & Microelectronics Manufacturing



Rev.22.01

'Partner' Large Facemask w/ Ear-loops


Non-sterile - ISO Class 5 + Cleanroom

LYNBOND



CONSTRUCTION

DESCRIPTION	MATERIAL
INNER LAYER	Spun lace Polypropylene
FILTER	Melt blown micro denier
OUTER LAYER	Spun lace Polypropylene
EAR LOOP	Spandex (20%) Polyester (80%)
NOSE WIRE	PVC Coated nose wire
SIZE	180 X 87mm (+/-5mm)
WEIGHT	3.0g/ea (+/-0.5g)
COLOUR	White

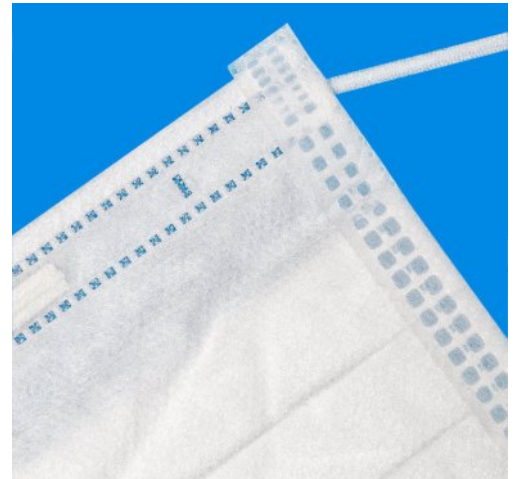

Particle Filtration Efficiency (%) 0.3µm	98%
Particles (>0.5µm)	<100 (Dry Flex Test)

INVENTORY MANAGEMENT

STORAGE INSTRUCTIONS	Store in cool dry place (below 40°C) away from direct sunlight and heat
SHELF LIFE	60 months from Date of Manufacture

ORDERING INFORMATION

PRODUCT CODE	30HNR
PACKAGING	BULK PACKED
MASKS / PACK	50



Rev.22.01